

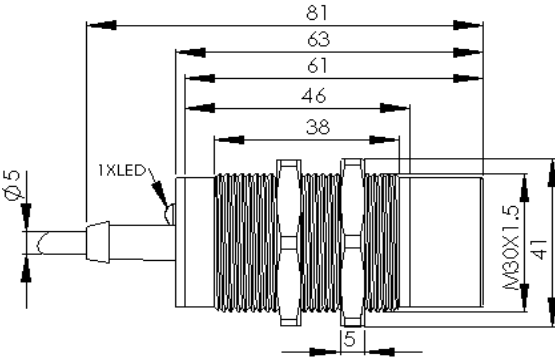
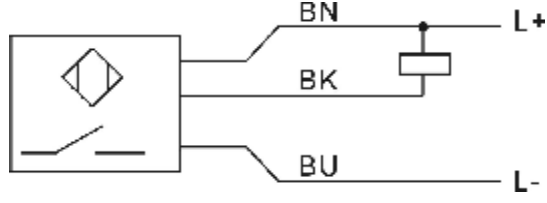


<p>ID1107 Inductive proximity sensor Metal thread M30 x 1.5 Cable Size 63mm  Sensing range 22mm[nf] Non-Flush</p>	
Electric design	DC NPN
Output	NO 
Operating voltage [V]	10...36 DC
Current loading [mA]	250
Short-circuit protection	Yes
Reverse polarity protection	Yes
Overload protection	Yes
Voltage drop [V]	<2.5
Consumed current[mA]	<15(24VDC)
Real Sensing range[mm]	22±10%
Operating range[mm]	0...17.6
Switch-point drift[%/Sr]	-10...10
Hysteresis[%/Sr]	1...15
Switching frequency[Hz]	100
ESD[KV]	6KV III
EFT[KV]	2KV III
Walkie talkie experiment[mm]	<1
Adjustment factors	Low carbon steel=1 /Stainless steel approx 0.7 /Brass approx 0.4 / Aluminum approx 0.3 / Copper approx 0.2
Operating temperature[°C]	-25°C...80°C
Protection classification	IP67
Dimension	
Housing material	Stainless steel , Sensing face: PBT
Switching state display LED	Red (90° )
Connection	PVC Cable /2m; 3x0.34mm <sup>2</sup>
Wiring	
Core color:	
BN +	
BU -	
BK Signal Line	
Accessory(Included)	Two fixed nuts